


קוטר ציר [מ"מ]	מק"ט	מידות [מ"מ]				עומסים [N]		מהירות מירבית [סל"ד]		משקל [ק"ג]
		d	D	B	r min	דינמי Cr	סטטי Cor	גרז	שנן	
40	22308ME4C4U15-VS	40	90	33	1.5	110000	116000	4500	6000	1.02
45	22309ME4C4U15-VS	45	100	36	1.5	136000	150000	4000	5300	1.38
50	22310ME4C4U15-VS	50	110	40	2	173000	192000	3800	4800	1.85
55	22311ME4C4U15-VS	55	120	43	2	195000	222000	3400	4300	2.35
60	22312ME4C4U15-VS	60	130	46	2.1	228000	258000	3200	4000	2.9
65	22313ME4C4U15-VS	65	140	48	2.1	241000	282000	3000	3800	3.54
70	22314ME4C4U15-VS	70	150	51	2.1	297000	340000	2800	3400	4.38
75	22315ME4C4U15-VS	75	160	55	2.1	320000	395000	2600	3200	5.38
80	22316ME4C4U15-VS	80	170	58	2.1	370000	445000	2400	3000	6.38
85	22317ME4C4U15-VS	85	180	60	3	400000	485000	2200	2800	7.37
90	22318ME4C4U15-VS	90	190	64	3	460000	555000	2200	2600	8.85
95	22319ME4C4U15-VS	95	200	67	3	490000	620000	2000	2600	10.3
100	22320ME4C4U15-VS	100	215	73	3	580000	715000	1900	2400	13.1
110	22322ME4C4U15-VS	110	240	80	3	715000	885000	1700	2200	18.3
120	22324ME4C4U15-VS	120	260	86	3	850000	1070000	1500	1900	23.3
130	22326ME4C4U15-VS	130	280	93	4	950000	1200000	1400	1800	28.7
140	22328ME4C4U15-VS	140	300	102	4	1100000	1410000	1300	1700	36
150	22330ME4C4U15-VS	150	320	108	4	1240000	1600000	1200	1500	43.1
160	22332ME4C4U15-VS	160	340	114	4	1380000	1800000	1100	1400	51.9
170	22334ME4C4U15-VS	170	360	120	4	1470000	1930000	1100	1300	60.5
180	22336ME4C4U15-VS	180	380	126	4	1620000	2150000	1000	1300	70.7
190	22338ME4C4U15-VS	190	400	132	5	1750000	2340000	950	1200	82.4
200	22340ME4C4U15-VS	200	420	138	5	1920000	2580000	900	1100	95

Bearings Tables; sponsored by NSK Ltd.

הגרז המומלץ למיסבים הוא: לתנאים רגילים **GREASE-PS2**, לחדרים נקיים **GREASE-LGU**.  
הגרז ניתן לרכישה בג'י-ירום גטר.

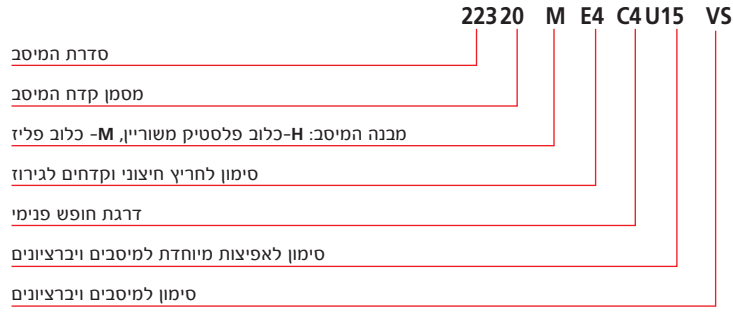

גודל מיסב	קוטר ציר		קוטר חיצוני		דרגת חופש פנימי	
	מידה [מ"מ]	אפיצות [µm]	מידה [מ"מ]	אפיצות [µm]	C3U15 [µm]	C4U15 [µm]
22308	40	0 / -7	90	-5 / -13	50~60	65~80
22309	45	0 / -7	100	-5 / -13	60~75	85~100
22310	50	0 / -7	110	-5 / -13	60~75	85~100
22311	55	0 / -9	120	-5 / -13	75~90	100~120
22312	60	0 / -9	130	-5 / -13	75~90	100~120
22313	65	0 / -9	140	-5 / -13	75~90	100~120
22314	70	0 / -9	150	-5 / -13	90~110	120~145
22315	75	0 / -9	160	-5 / -18	90~110	120~145
22316	80	0 / -9	170	-5 / -18	90~110	120~145
22317	85	0 / -12	180	-5 / -18	110~135	150~180
22318	90	0 / -12	190	-10 / -23	110~135	150~180
22319	95	0 / -12	200	-10 / -23	110~135	150~180
22320	100	0 / -12	215	-10 / -23	110~135	150~180
22322	110	0 / -12	240	-10 / -23	135~160	180~210
22324	120	0 / -12	260	-10 / -23	135~160	180~210
22326	130	0 / -15	280	-10 / -23	160~190	205~240
22328	140	0 / -15	300	-10 / -23	160~190	205~240
22330	150	0 / -15	320	-13 / -28	190~220	240~280
22332	160	0 / -15	340	-13 / -28	190~220	240~280
22334	170	0 / -15	360	-13 / -28	200~240	260~310
22336	180	0 / -15	380	-13 / -28	200~240	260~310
22338	190	0 / -18	400	-13 / -28	220~260	285~340
22340	200	0 / -18	420	-13 / -30	220~260	285~340

Bearings Tables; sponsored by NSK Ltd.

הגריז המומלץ למיסבים הוא: לתנאים רגילים **GREASE-PS2**, לחדרים נקיים **GREASE-LGU**.  
הגריז ניתן לרכישה בג'יג'י-ירום גטר.